



5200 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5137
1000-2000 MHz
1000 WATTS
LINEAR POWER RF AMPLIFIER

Solid State Broadband High Power RF Amplifier

The 5137 is a 1000 Watt broadband amplifier that covers the 1000-2000 MHz frequency range. This amplifier utilizes Class A linear Gallium Nitride (GaN) power devices that provide an excellent output power, VSWR tolerance, and a wide dynamic range.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability. Like all OPHIR_{RF} amplifiers, the 5137 comes backed by Ophir RF's commitment to total customer satisfaction.


	<u>Parameter</u>	<u>Specification @ 25° C</u>
<u>Electrical</u>		
1	Frequency Range	1000-2000 MHz
2	Saturated Output Power	1000 Watts Minimum
3	Power at P _{1dB}	600 Watts Minimum
4	Small Signal Gain	+60 dB Minimum
5	Gain Flatness	± 2.0 dB Maximum
6	Input VSWR	2:1 max
7	Harmonics	-15 dBc min @ 600 Watts
8	Spurious Signals	< -60 dBc typical @ 600 Watts
9	Input/Output Impedance	50 Ohms nominal
10	AC Input Power	10,000 Watts Maximum
11	AC Input	180-240 VAC, Single Phase Optional: 208 VAC 3Ø, 60 Hz "WYE"
12	Nominal RF Input	0 dBm
13	Maximum RF input	+10 dBm Maximum
14	RF Input Signal Format	CW/AM/FM/PM/Pulse
15	Class of Operation	Class A
<u>Mechanical</u>		
17	Dimensions (8RU)	19" x 14.0" x 24"
18	Weight	200 Lbs.
19	RF Connectors	Type-N Input Type 7/16 DIN Output
20	Grounding	Chassis
21	Cooling	Internal Forced Air
<u>Environmental</u>		
22	Operating Temperature	0° C to +50° C
23	Operating Humidity	95% Non-condensing
24	Operating Altitude	Up to 10,000' Above Sea Level
25	Shock and Vibration	Normal Truck Transport

Specifications subject to change without notice



5200 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com


MODEL 5137
1000-2000 MHz
1000 WATTS
LINEAR POWER RF AMPLIFIER

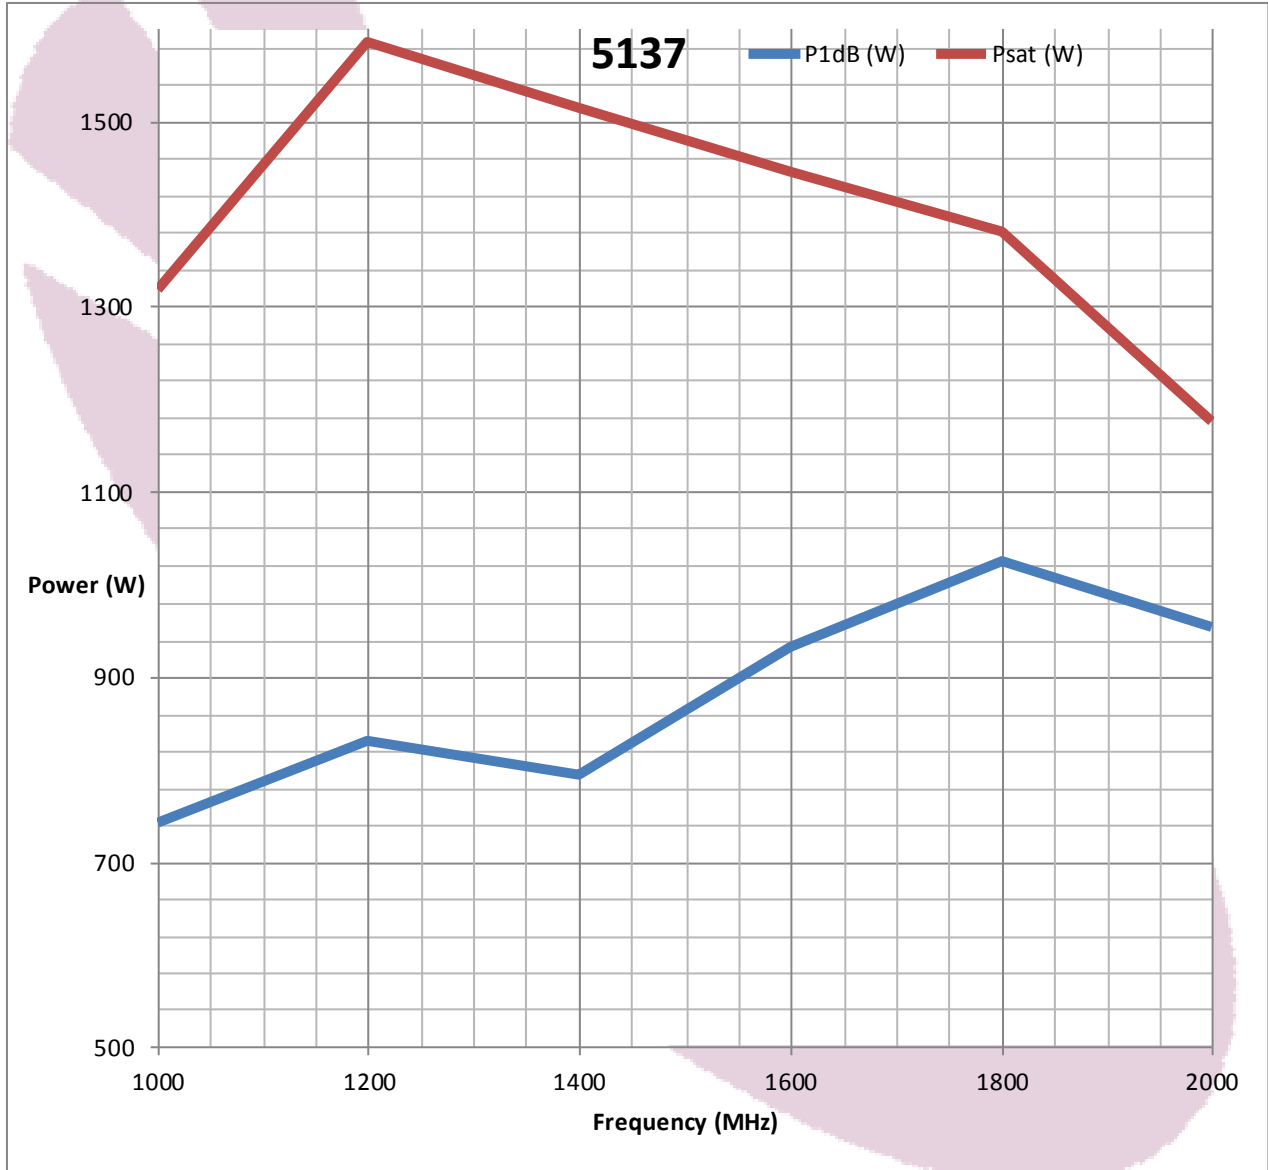

Specifications subject to change without notice



Proudly made
in the U.S.A.

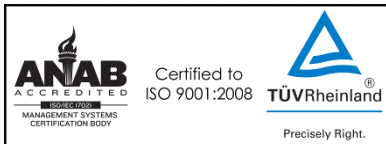



5200 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5137
1000-2000 MHz
1000 WATTS
LINEAR POWER RF AMPLIFIER

FRONT PANEL CONTROLLER FEATURES

- ◇ - Forward Power Monitoring (dBm and Watts)
- ◇ - Reflected Power Monitoring (dBm and Watts)
- ◇ - Gain Control (20 dB dynamic range of adjustment)
- ◇ - Fault Status
- ◇ - Full Protection Of any VSWR Condition, Open or Short, into any Phase Angle
- ◇ - Remote Control Access via the Ethernet, RS-232, or IEEE-488 Communications ports
- ◇ - Integrated Automatic Leveling Control to allow end-user to maintain output even with variances in temperature, or input RF level
- ◇ - Standby/Enable Control
- ◇ - Front Panel Display for easy viewing of System Status Locally
- ◇ - Keypad buttons for full local control

CIRCUIT PROTECTIONS

- ◇ - Thermal Overload
- ◇ - Over Current
- ◇ - Over Voltage
- ◇ - Open or Short VSWR Conditions

CIRCUIT CONTROL

- ◇ - Standby (amplifier disable)
- ◇ - Gain/power setting with 20dB range
- ◇ - VSWR protection Reset
- ◇ - ALC On/ Off

CIRCUIT INDICATIONS

- ◇ - Forward Power
- ◇ - Reflected power
- ◇ - VSWR Fault
- ◇ - Temp Fault
- ◇ - Gain Setting (VVA) percentage



SIMILAR "RE" MODEL SHOWN

ORDERING MODELS

- RE Rear RF Connector model with Front Panel Controller Ethernet, IEEE-488 and RS232
- FE Front RF Connector model with Front Panel Controller Ethernet, IEEE-488 and RS232