



5200 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5226
80 - 1000 MHz
300 WATTS
LINEAR POWER RF AMPLIFIER

Solid State Broadband High Power RF Amplifier

The 5226 is a 300 Watt broadband amplifier that covers the 80 – 1000 MHz frequency range. This amplifier utilizes Class A linear power devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability.

Like all OPHIR_{RF} amplifiers, the 5226 comes with an extended multiyear warranty backed by Ophir RF's commitment to total customer satisfaction.

	<u>Parameter</u>	<u>Specification @ 25° C</u>
<u>Electrical</u>		
1	Frequency Range	80 – 1000 MHz
2	Saturated Output Power	300 Watts Minimum
3	Power at P1dB	200 Watts Minimum
4	Small Signal Gain	+56 dB Minimum
5	Gain Flatness	± 2.0 dB Maximum
6	IP ₃	+62 dBm typical
7	Input VSWR	2:1 max
8	Harmonics	-20 dBc Min @ 200 Watts
9	Spurious Signals	< -60 dBc typical @ 200 Watts
10	Input/Output Impedance	50 Ohms nominal
11	AC Input Power	2,200 Watts Maximum
12	AC Input	180 – 240 VAC, single phase, 47-63 Hz
13	RF Input	0 dBm max
14	RF Input Signal Format	CW/AM/FM/PM/Pulse
15	Class of Operation	Class A
<u>Mechanical</u>		
16	Dimensions (3RU)	19" x 5.25 x 26"
17	Weight	54 lbs.
18	Connectors	Type-N
19	Grounding	Chassis
20	Cooling	Internal Forced Air
<u>Environmental</u>		
21	Operating Temperature	0° C to +50° C
22	Operating Humidity	95% Non-condensing
23	Operating Altitude	Up to 10,000' Above Sea Level
24	Shock and Vibration	Normal Truck Transport

Specifications subject to change without notice



5200 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com


MODEL 5226
80 - 1000 MHz
300 WATTS
LINEAR POWER RF AMPLIFIER

	<u>Parameter</u>
<u>Front Panel Controller</u>	
25	Forward Power Monitoring
26	Reflected Power Monitoring
27	Gain Control (25 dB dynamic range of adjustment)
28	Fault Status
29	Full Protection Of any VSWR Condition, Open or Short, any Phase.
30	Remote Control Access via the Ethernet, RS-232, or IEEE-488 Communications ports
31	Integrated Automatic Leveling Control to allow end-user to maintain output even with variances in temperature, or input RF level
32	Standby/Enable Control
33	Front Panel Display for easy viewing of System Status Locally
34	Keypad buttons for full local control
<u>Circuit Protections</u>	
35	Thermal Overload
36	Over Current
37	Over Voltage
38	Open or Short VSWR Conditions
<u>Circuit Control</u>	
39	Standby (amplifier disable)
40	Gain/power setting with 25dB range
41	VSWR protection Reset
42	ALC On/ Off
<u>Circuit Indications</u>	
43	Forward Power
44	Reflected power
45	VSWR Fault
46	Temp Fault
47	Gain Setting (VVA) percentage
<u>Options</u>	
48	AC Input power options (3Ø, 400 Hz, DC, etc.)
49	Outdoor Chassis
50	Switched Filter Bank for Harmonic Suppression & FCC Spectral Mask Compliance



5200 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5226
80 - 1000 MHz
300 WATTS
LINEAR POWER RF AMPLIFIER

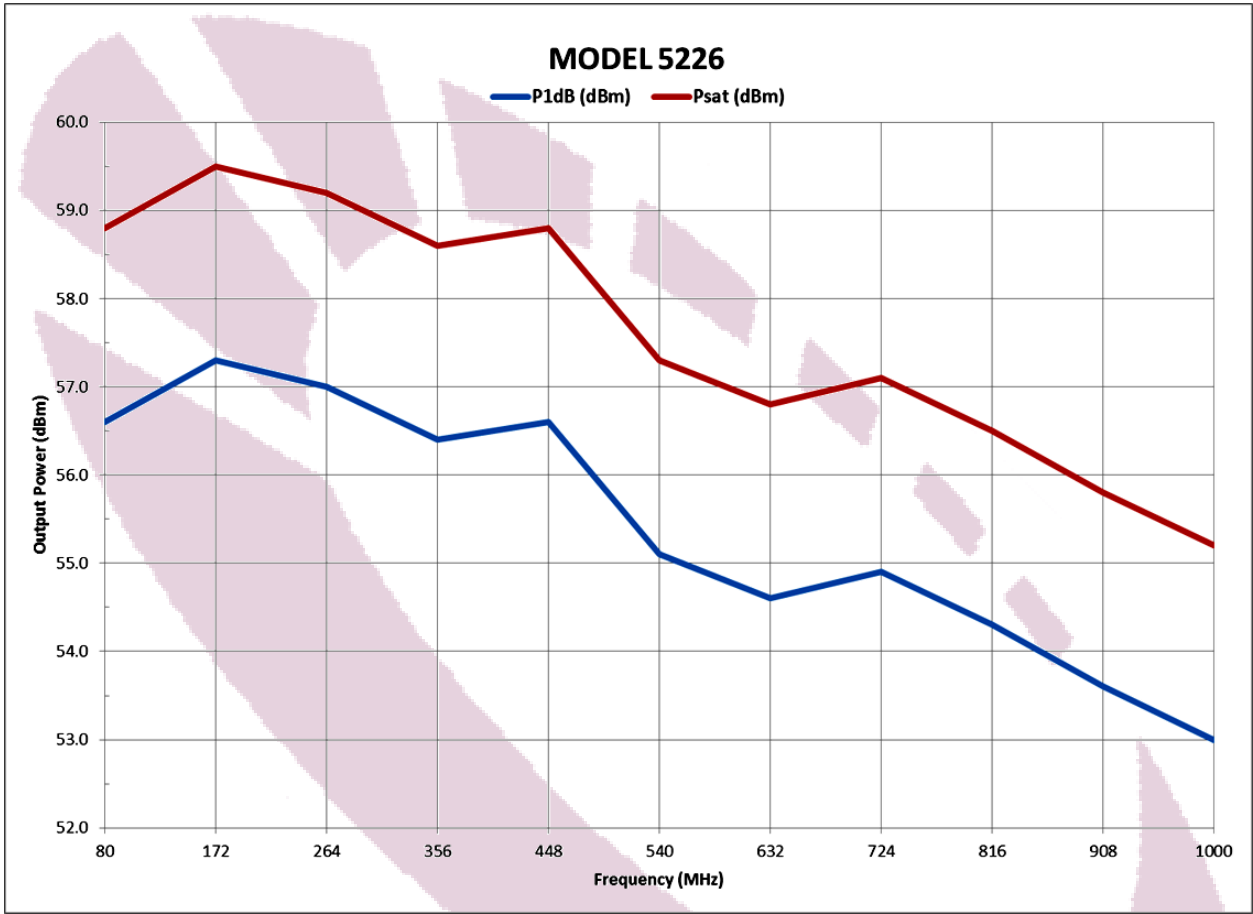

FE MODEL SHOWN

ORDERING MODELS

- ◇ RE Rear RF Connector model with Front Panel Controller Ethernet, IEEE-488 and RS232
- ◇ FE Front RF Connector model with Front Panel Controller Ethernet, IEEE-488 and RS232
- ◇ R Rear RF Connector model
- ◇ F Front RF Connector model



0420 Approved By: _____ Date: _____