



5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5295
700-6000 MHz
200 WATTS
LINEAR POWER RF AMPLIFIER

**Solid State
 Broadband High
 Power RF Amplifier**

The 5295 is a 200 Watt broadband amplifier that covers the 700-6000 MHz frequency range. This small and lightweight amplifier utilizes Class A linear power devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability.

Like all OPHIR_{RF} amplifiers, the 5295 comes with an extended multiyear warranty backed by Ophir RF's commitment to total customer satisfaction.

	<u>Parameter</u>	<u>Specification @ 25° C</u>
<u>Electrical</u>		
1	Frequency Range	700-6000 MHz
2	Power Out at PsAT	200 Watts Typical
	Power Out at P1dB	120 Watts Minimum
4	Small Signal Gain	+50 dB min
5	Power Flatness @ Psat	+/- 3.5 dB
6	IP ₃	+60 dBm typical
7	Input VSWR	2:1 max
8	Harmonics	-20 dBc typical @ 120 W
9	Spurious Signals	< -60 dBc typical @ 120 W
10	Input/Output Impedance	50 Ohms nominal
11	AC Input Power	3,800 Watts max
12	AC Input	180 – 264 VAC, single phase
13	RF Input	+5 dBm nominal +10 dBm max
14	RF Input Signal Format	CW/AM/FM/PM/Pulse
15	Class of Operation	A
<u>Mechanical</u>		
16	Dimensions: (W x H x D) 5RU	19.0" x 8.75" x 26.0"
17	Weight	105 lbs.
18	Connectors	Type-N
19	Grounding	Chassis
20	Cooling	Internal Forced Air
<u>Environmental</u>		
21	Operating Temperature	0° C to +50° C
22	Operating Humidity	95% Non-condensing
23	Operating Altitude	Up to 10,000' Above Sea Level
24	Shock and Vibration	Normal Truck Transport

Specifications subject to change without notice



FE MODEL SHOWN

ORDERING MODELS

- ◇ RE - Rear RF Connector model with Front Panel Controller Ethernet, IEEE-488 and RS232
- ◇ FE - Front RF Connector model with Front Panel Controller Ethernet, IEEE-488 and RS232
- ◇ R - Rear RF Connector model
- ◇ F - Front RF Connector model



5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5295
700-6000 MHz
200 WATTS
LINEAR POWER RF AMPLIFIER

FRONT PANEL CONTROLLER FEATURES (*Optional*)

- ◇ - Forward Power Monitoring (dBm or Watts)
- ◇ - Reflected Power Monitoring (dBm or Watts)
- ◇ - Gain Control (20 dB dynamic range of adjustment)
- ◇ - Fault Status
- ◇ - Full Protection Of any VSWR Condition, Open or Short, into any Phase Angle
- ◇ - Remote Control Access via the Ethernet, RS-232, or IEEE-488 Communications ports
- ◇ - Integrated Automatic Leveling Control to allow end-user to maintain output even with variances in temperature, or input RF level
- ◇ - Standby/Enable Control
- ◇ - Front Panel Display for easy viewing of System Status Locally
- ◇ - Keypad buttons for full local control

CIRCUIT PROTECTIONS

- ◇ - Thermal Overload
- ◇ - Over Current
- ◇ - Over Voltage
- ◇ - Open or Short VSWR Conditions (*With Front Panel Controller*)

CIRCUIT CONTROL (*WITH FRONT PANEL CONTROLLER*)

- ◇ - Standby (amplifier disable)
- ◇ - Gain/power setting with 20dB range
- ◇ - VSWR protection Reset
- ◇ - ALC On/ Off

CIRCUIT INDICATIONS (*WITH FRONT PANEL CONTROLLER*)

- ◇ - Forward Power
- ◇ - Reflected power
- ◇ - VSWR Fault
- ◇ - Temp Fault
- ◇ - Gain Setting (VVA) percentage

RFPA SYSTEM OPTIONS




- ◇ - Switched Filter Bank
- ◇ - Input Power Requirements
- ◇ - Ruggedized Version
- ◇ - Cabinet Requirements
- ◇ - Outdoor Version
- ◇ - Sample Ports
- ◇ - Racking Options
- ◇ - Many More!
- ◇ - **Consult Factory with Specific Requirements**





5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5295
700-6000 MHz
200 WATTS
LINEAR POWER RF AMPLIFIER

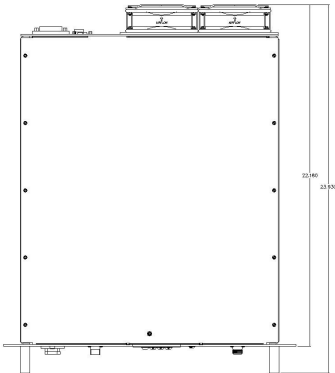

MADE IN USA

