



5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

Solid State Broadband High Power RF Amplifier

The 5902380 is a 30 Watt broadband amplifier that covers the 1.2 – 1.6 GHz frequency range. This small and lightweight amplifier utilizes Class AB linear power devices that provide an excellent efficiency, high gain, and a wide dynamic range.


Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability.

MODEL 5902380

**1.2 - 1.6 GHz
30 WATTS
POWER RF AMPLIFIER**

| | Parameter | Specification @ 25° C |
|----------------------|--|---------------------------------------|
| Electrical | | |
| 1 | Frequency Range | 1.2 – 1.6GHz |
| 2 | Saturated Output Power | 30 Watts minimum |
| 4 | Small Signal Gain | +45 dB min |
| 5 | Power Gain Flatness | ± 0.75 dB max |
| 7 | Input VSWR | 2:1 max |
| 8 | Harmonics | -20 dBc typical |
| 9 | Spurious Signals | < -60 dBc typical |
| 10 | DC Consumption | 100W maximum |
| 11 | DC Input Voltage | 28V |
| 12 | RF Input drive required For a rated power | 0dBm nominal |
| 13 | VSWR Protection | Protected by Isolator |
| 14 | Class of Operation | AB |
| 15 | TTL Blanking | 5V - Enable 5uS On/Off |
| Mechanical | | |
| 16 | Dimensions | 8.6" x 5.4" x 3.4" |
| 17 | Weight | 5 lb. max |
| 18 | Connectors | SMA female for RF Feed Thru for DC |
| 19 | Grounding | Chassis |
| 20 | Cooling | Adequate Heatsink Required |
| Environmental | | |
| 21 | Baseplate Temperature | -10° C to +60° C |
| 22 | Operating Humidity | 95% Non-condensing |
| 23 | Operating Altitude | Up to 10,000' Above Sea Level |
| 24 | Shock and Vibration | Normal truck transportation |

Specifications subject to change without notice

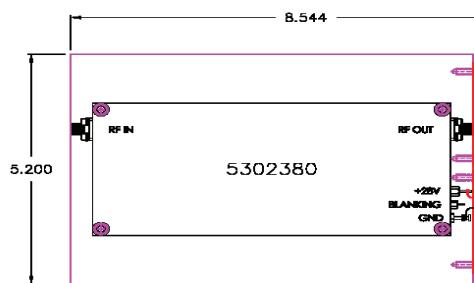

FEATURES: Heatsink Included

