



5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5312
0.15 - 200 MHz
25 WATTS
LINEAR POWER RF AMPLIFIER

**Solid State
 Broadband High
 Power RF Amplifier**

The 5312 is a 25 Watt broadband amplifier that covers the 0.15 – 200 MHz frequency range. This small and lightweight amplifier utilizes Class A/AB linear power devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability.

The 5312 has the RF connectors located on the front panel. The AC input receptacle is located at the rear of the amplifier.

	<u>Parameter</u>	<u>Specification @ 25° C</u>
<u>Electrical</u>		
1	Frequency Range	0.15 – 200 MHz
2	Saturated Output Power	25 Watts typical
3	Power Output @ 1dB Comp.	15 Watts min
4	Small Signal Gain	+44 dB min
5	Small Signal Gain Flatness	± 2.0 dB max
6	IP ₃	+48 dBm typical
7	Input VSWR	2:1 max
8	Harmonics	-20 dBc typical @ 12 Watts
9	Spurious Signals	< -60 dBc typical @ 12 Watts
10	Input/Output Impedance	50 Ohms nominal
11	AC Input Power	300 Watts max
12	AC Input	100 – 240 VAC, single phase
13	RF Input	+3 dBm max
14	RF Input Signal Format	CW/AM/FM/PM/Pulse
15	Class of Operation	A/AB
<u>Mechanical</u>		
16	Dimensions	7" x 5.6" x 12"
17	Weight	9 Lbs.
18	Connectors	Type-N
19	Grounding	Chassis
20	Cooling	Internal Forced Air
<u>Environmental</u>		
21	Operating Temperature	0° C to +50° C
22	Operating Humidity	95% Non-condensing
23	Operating Altitude	Up to 10,000' Above Sea Level
24	Shock and Vibration	Normal Truck Transport



Specifications subject to change without notice





5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5312
0.15 - 200 MHz
25 WATTS
LINEAR POWER RF AMPLIFIER

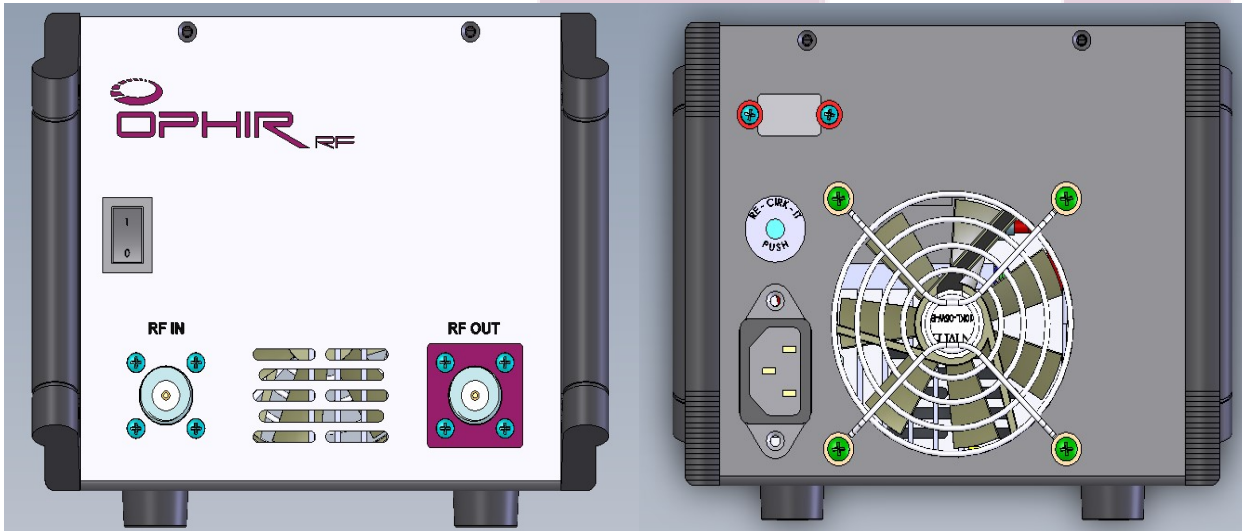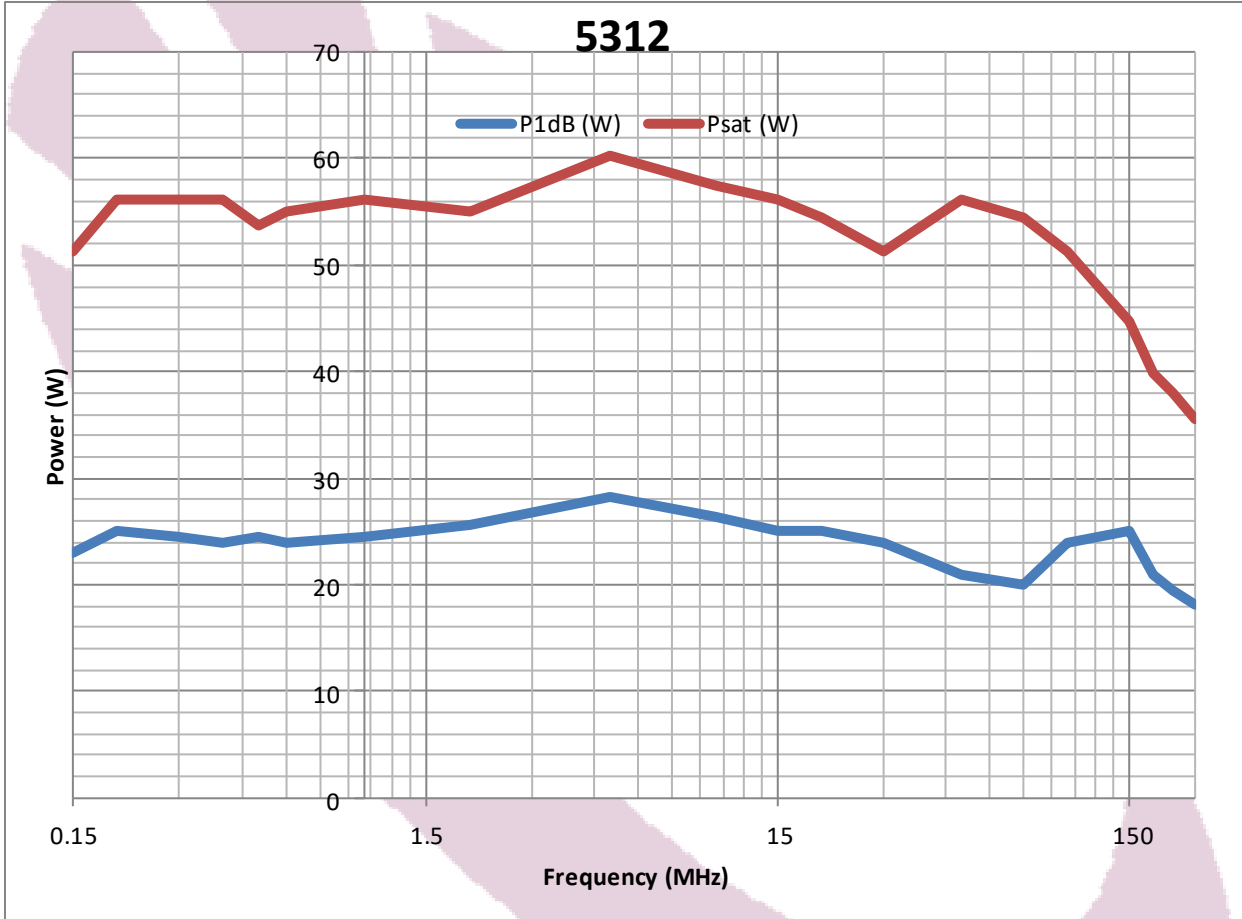

Front View of Amplifier

Rear View of Amplifier