



5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 4155
2.5-7.5 GHz
250 WATTS
LINEAR POWER RF AMPLIFIER

Solid State Broadband High Power RF Amplifier

The 4155 is a 250 Watt broadband amplifier that covers the 2.5-7.5 GHz frequency range. This small and lightweight amplifier utilizes Class A linear power devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability, Like all OPHIR_{RF} amplifiers, the 4155 comes with an extended multiyear warranty backed by Ophir RF's commitment to total customer satisfaction.

	Parameter	Specification @ 25° C			
		Minimum	Nominal	Maximum	Unit
<u>Electrical</u>					
1	Frequency Range	2.5		7.5	GHz
2	Power at P _{SAT}	200	250		Watts
3	Power at P _{1dB}		120		Watts
4	Small Signal Gain	55			dB
5	Gain Flatness			+3.5	dB
6	IP ₃		58		dBm
7	Input VSWR			2:1	Ratio
8	Harmonics @ 250W	-12	-20		dBc
9	Spurious Signal @ 250W		-60		dBc
10	Input/Output Impedance		50		Ohms
11	AC Input Power			2300	Watts
12	AC Input	180-240 VAC Single Phase			
13	RF Input (No Damage)			+3	dBm
14	RF Input Signal Format	CW/AM/FM/PM/Pulse			
15	Class of Operation	Class A			
<u>Mechanical</u>					
16	Dimensions H x W x D	14" x 19" x 26"(H x W x D)			
17	Weight	130 Lbs.			
18	RF Connectors	Type-N Female Input Type-N Female Output			
19	Grounding	Chassis			
20	Cooling	Internal Forced Air			
<u>Environmental</u>					
21	Operating Temperature	0		50	° C
22	Operating Humidity	95% Non-condensing			
23	Operating Altitude	Up to 10,000' Above Sea Level			
24	Shock and Vibration	Normal Truck Transport			

Specifications subject to change without notice



0724 Approved By: _____ Date: _____



5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 4155

2.5-7.5 GHz
250 WATTS
LINEAR POWER RF AMPLIFIER

FRONT PANEL CONTROLLER

- ◇ - Forward Power Monitoring (dBm or Watts)
- ◇ - Reflected Power Monitoring (dBm or Watts)
- ◇ - Gain Control (20 dB dynamic range of adjustment)
- ◇ - Fault Status
- ◇ - Full Protection Of any VSWR Condition, Open or Short, into any Phase Angle
- ◇ - Remote Control Access via the Ethernet, RS-232, or IEEE-488 Communications ports
- ◇ - Integrated Automatic Leveling Control to allow end-user to maintain output even with variances in temperature, or input RF level
- ◇ - Standby/Enable Control
- ◇ - Front Panel Display for easy viewing of System Status Locally
- ◇ - Keypad buttons for full local control

CIRCUIT PROTECTIONS

- ◇ - Thermal Overload
- ◇ - Over Current
- ◇ - Over Voltage
- ◇ - Open or Short VSWR Conditions

CIRCUIT CONTROL

- ◇ - Standby (amplifier disable)
- ◇ - Gain/power setting with 20dB range
- ◇ - VSWR protection Reset
- ◇ - ALC On/ Off

CIRCUIT INDICATION

- ◇ - Forward Power
- ◇ - Reflected power
- ◇ - VSWR Fault
- ◇ - Temp Fault
- ◇ - Gain Setting (VVA) percentage

RFPA SYSTEM OPTIONS


- ◇ - Switched Filter Bank
- ◇ - Input Power Requirements
- ◇ - Ruggedized Version
- ◇ - Cabinet Requirements
- ◇ - Outdoor Version
- ◇ - Sample Ports
- ◇ - Racking Options
- ◇ - Front Panel Controller ("E" Option)
- ◇ - **Consult Factory with Specific Requirements**

Specifications subject to change without notice



5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 4155
2.5-7.5 GHz
250 WATTS
LINEAR POWER RF AMPLIFIER

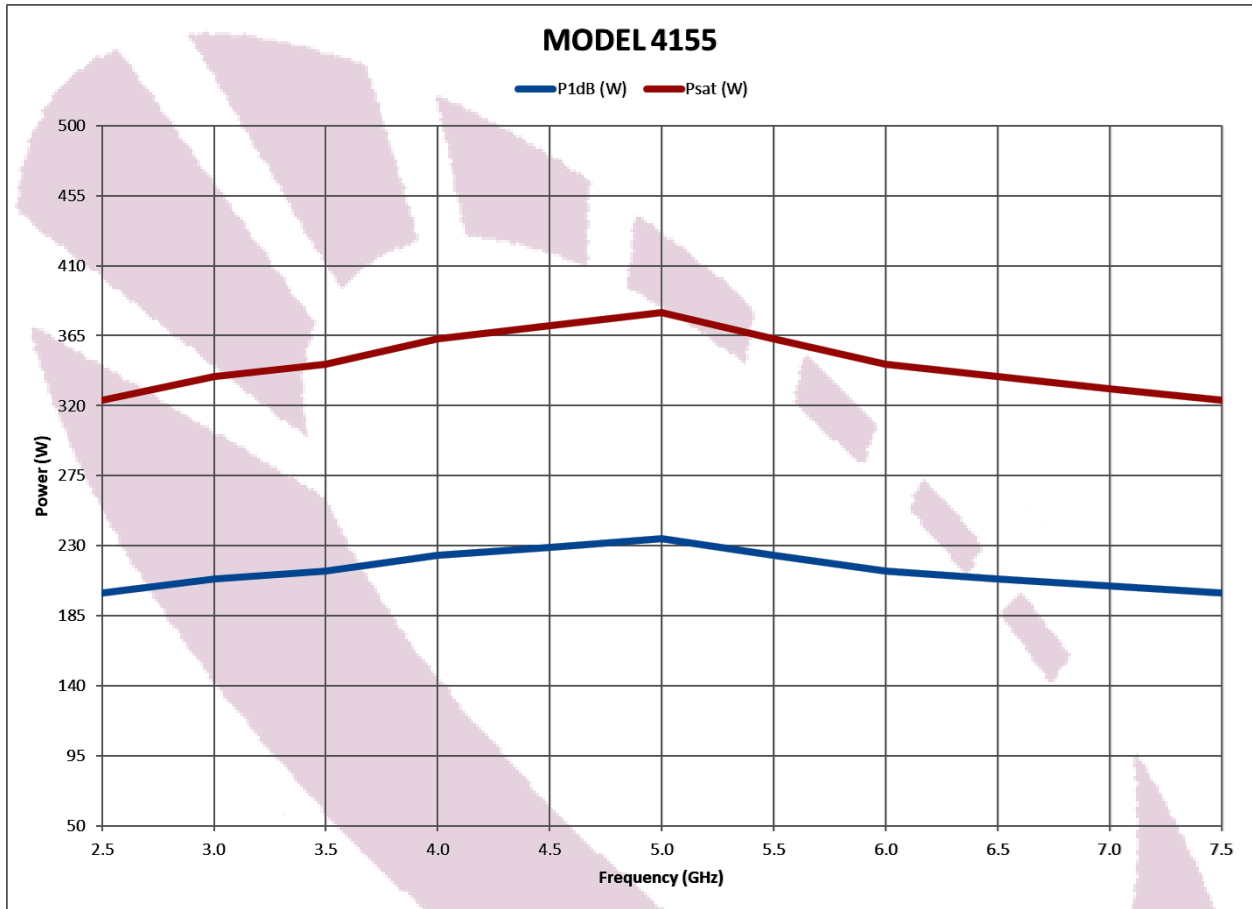

Specifications subject to change without notice



ORDERING MODELS

- ◇ RE - Rear RF Connector model with Front Panel Controller Ethernet, IEEE-488 and RS232

