



5300 Beethoven Street, Los Angeles, CA 90066  
 TEL: (310)306-5556 • FAX: (310)821-7413  
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

**MODEL 5135**  
**800-2000 MHz**  
**300 WATTS**  
**RF POWER AMPLIFIER**

### Solid State Broadband High Power RF Amplifier

The 5135 is a very high power broadband amplifier that covers the 800-2000 MHz frequency range. This amplifier utilizes Class A linear power devices that provide an excellent 3<sup>rd</sup> order intercept point, high gain, a wide dynamic range, and an industry leading P1dB performance.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability. Like all OPHIR<sub>RF</sub> amplifiers, the 5135 comes with a multiyear warranty backed by Ophir RF's commitment to total customer satisfaction.

	<u>Parameter</u>	<u>Specification @ 25° C</u>
<b><u>Electrical</u></b>		
1	Frequency Range	0.8-2.0 GHz
2	Output Power P <sub>SAT</sub>	300 Watts Minimum
3	Output Power P <sub>1dB</sub>	150 Watts Minimum
4	Small Signal Gain	+56 dB Minimum
5	Gain Flatness	± 2.5 dB Maximum
6	IP <sub>3</sub>	+ 60 dBm typical
7	Input VSWR	2:1 max
8	Harmonics	-20 dBc min @ 150 Watts
9	Spurious Signals	< -60 dBc typical @ 150 Watts
10	Input/Output Impedance	50 Ohms nominal
11	AC Input Power	2,000 Watts Maximum
12	AC Input	100-240 VAC, Single Phase
13	RF Input	0 dBm nominal <b>+3 dBm Maximum</b>
14	RF Input Signal Format	CW/AM/FM/PM/Pulse
15	Class of Operation	Class A
<b><u>Mechanical</u></b>		
16	Dimensions (W x H x D)	19" x 5.25" x 26"
17	Weight	68 lbs. Nominal
18	RF Connectors	Type-N Female Input/Output
19	Grounding	Chassis
20	Cooling	Internal Forced Air
<b><u>Environmental</u></b>		
21	Operating Temperature	0° C to +50° C
22	Operating Humidity	95% Non-condensing
23	Operating Altitude	Up to 10,000' Above Sea Level
24	Shock and Vibration	Normal Truck Transport

*Specifications subject to change without notice*



5300 Beethoven Street, Los Angeles, CA 90066  
 TEL: (310)306-5556 • FAX: (310)821-7413  
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

**MODEL 5135**  
**800-2000 MHz**  
**300 WATTS**  
**RF POWER AMPLIFIER**


	<u>Parameter</u>
<b><u>Front Panel Controller</u></b>	<i>Optional Feature</i>
25	Forward Power Monitoring (dBm or Watts)
26	Reflected Power Monitoring (dBm or Watts)
27	Gain Control (25 dB dynamic range of adjustment)
28	Fault Status
29	Full Protection Of any VSWR Condition, Open or Short, any Phase.
30	Remote Control Access via the Ethernet, RS-232, or IEEE-488 Communications ports
31	Integrated Automatic Leveling Control to allow end-user to maintain output even with variances in temperature, or input RF level
32	Standby/Enable Control
33	Front Panel Display for easy viewing of System Status Locally
34	Keypad buttons for full local control
<b><u>Circuit Protections</u></b>	
35	Thermal Overload
36	Over Current
37	Over Voltage
38	Open or Short VSWR Conditions <i>(With Front Panel Controller)</i>
<b><u>Circuit Control</u></b>	<i>(With Front Panel Controller)</i>
39	Standby (amplifier disable)
40	Gain/power setting with 25dB range
41	VSWR protection Reset
42	ALC On/ Off
<b><u>Circuit Indications</u></b>	
43	Forward Power <i>(With Front Panel Controller)</i>
44	Reflected power <i>(With Front Panel Controller)</i>
45	VSWR Fault <i>(With Front Panel Controller)</i>
46	Temp Fault
47	Gain Setting (VVA) percentage <i>(With Front Panel Controller)</i>





5300 Beethoven Street, Los Angeles, CA 90066  
TEL: (310)306-5556 • FAX: (310)821-7413  
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

**MODEL 5135**  
**800-2000 MHz**  
**300 WATTS**  
**RF POWER AMPLIFIER**

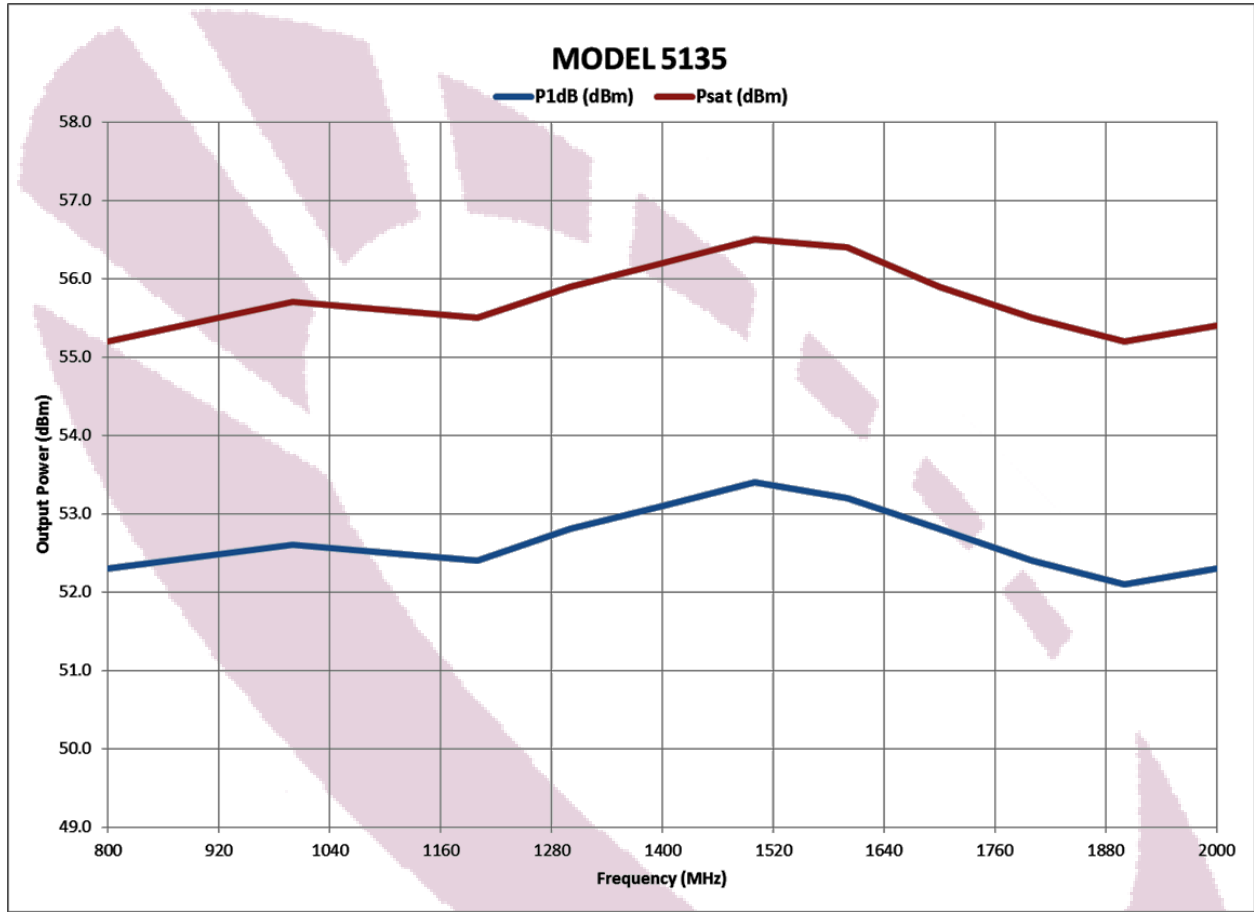

*Specifications subject to change without notice*



**FE VERSION SHOWN**

**ORDERING MODELS**

- RE** ◇ Rear RF Connector model with Front Panel Controller Ethernet, IEEE-488 and RS232
- FE** ◇ Front RF Connector model with Front Panel Controller Ethernet, IEEE-488 and RS232
- R** ◇ Rear RF Connector model
- F** ◇ Front RF Connector model