



5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5303177

2.0-18 GHz
10 WATTS
LINEAR POWER RF AMPLIFIER

Solid State Broadband High Power RF Amplifier

The 5303177 is a 10 Watt broadband amplifier that covers the 2.0-18 GHz frequency range. This small and lightweight amplifier utilizes Class A/AB linear Gallium Nitride (GaN) devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range. Due to robust engineering and employment of the most advanced gallium nitride (GaN) devices and components, this amplifier achieves high efficiency operation with proven reliability. Like all OPHIR_{RF} amplifiers, the 5303177 comes backed by Ophir RF's commitment to total customer satisfaction.

	Parameter	Specification @ 25° C			Unit of Measure
		Minimum	Nominal	Maximum	
Electrical					
1	Frequency Range	2		18	GHz
2	Output Power P _{SAT}	8	12		Watts
3	Output Power P _{1dB}		3		Watts
4	Small Signal Gain	30			dB
5	Gain Flatness		± 4.0	± 5.0	dB
6	IP ₃		42		dBm
7	Input VSWR			2:1	Ratio
8	Harmonics @ 10 Watts		-20	-12	dBc
9	Spurious @ 10 Watts		-60	-55	dBc
10	Input/Output Impedance		50		Ohms
11	DC Input Current @ 10W		5.6	7	Amps
12	DC Input		22	24	VDC
13	RF Input for Rated Power		+10	+13	dBm
14	Blanking (Rise/Fall)		3	5	µSec
15	RF Input Signal Format	CW/AM/FM/PM/Pulse			
16	Class of Operation	A/AB			
Mechanical					
17	Dimensions (L x W x H)	3" x 2.7" x 0.7"			
18	Weight		1.0		lbs.
19	RF Input Connector	SMA female			
20	RF output Connector	SMA Female			
21	Grounding	Chassis			
22	Cooling	Adequate Heatsink and Airflow Required			
Environmental					
23	Operating Temperature Baseplate	-20		+60	°C
24	Operating Humidity, Non-Condensing			95	%
25	Operating Altitude			40,000	Feet above sea Level
26	MIL-STD 810G Shock and Vibration	Shock Method 514.5 Vibration Method 516.5			


Specifications subject to change without notice.

12/24 Approved By: _____ Date: _____



5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5303177
2.0-18 GHz
10 WATTS
LINEAR POWER RF AMPLIFIER

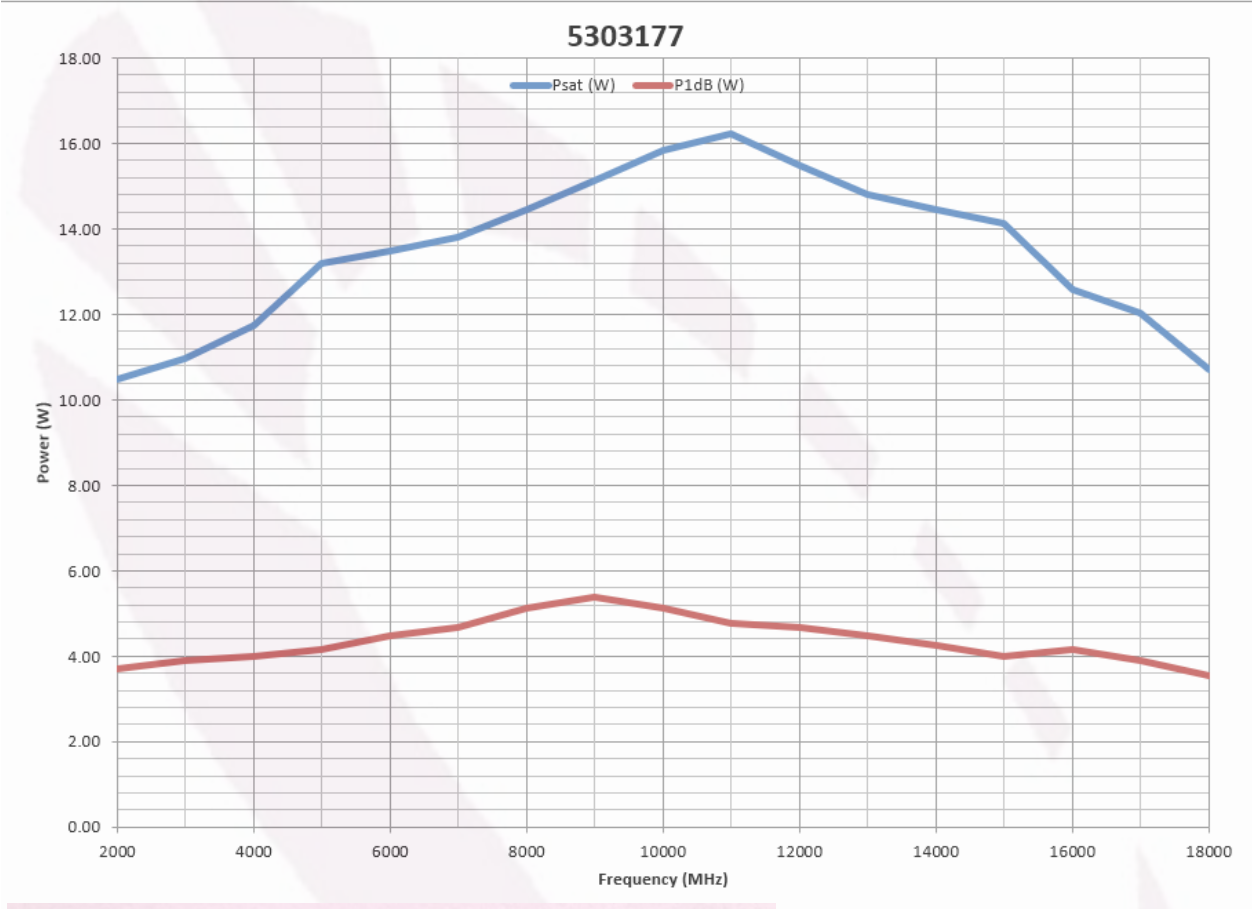

Similar Module shown

12/24 Approved By: _____ Date: _____